

**Chain Link Fence
District Two
North East Lot**

- The contractor shall provide all labor, equipment, materials and incidentals to furnish and install approximately 625' of 6' high, 9 ga. 2 oz. chain link fence, with 3 strands of barbed wire with arms. Also included is one 24' cantilever gate and a 3' walk through gate. Fence will have 4" gate posts, 3" terminal posts, 2 ½" line posts, 1 5/8" top rail, 7 ga. bottom tension wire and knee bracing. All posts will be full weight.
- The fence shall be located approximately 1' inside the edge of the asphalt.
- The 3' walk through gate is to be located approximately 107' west of the SE corner of the area to be fenced. The 24' cantilever gate is to be installed adjacent directly to the west of the walk through gate. See attached drawing.
- Footings shall be drilled through the asphalt surface. A core drill must be used on the asphalt to provide a neat appearance. Any other method must be approved prior to performing the work. The contractor is to fill with truck poured concrete. Extend the top of the footing slightly above the ground line and steel trowel to a smooth finish with a slope to drain away from the post.
- Footings shall be a minimum of 10" in diameter for line posts and minimum of 12" in diameter for corner and end posts.
- Set the posts and braces in advance of placing the fence to allow the concrete time to obtain its strength.
- Maximum post spacing of 10'.
- Posts shall be set a minimum of 2 ½' below the finished surface of the ground in concrete footings. (Each post shall be a minimum of 8 ½' in length.)
- Fasten the chain link fence to the posts with aluminum or galvanized fabric bands spaced approximately 14" apart. Securely fasten fence to the end posts by approved type metal fasteners.
- Project to be completed within 45 days of contract being awarded.
- It is recommended bidders visit the jobsite in order to ascertain what is required for an acceptable project. KDOT contact person for this project is James Roudybush, phone 785-823-3754.


Project DIST II N.E. LOT FENCING Br. No. _____ County _____

Type of Work _____ Subject _____ Change in Plans No. _____

NOT TO SCALE

ANTHEM STREET

N

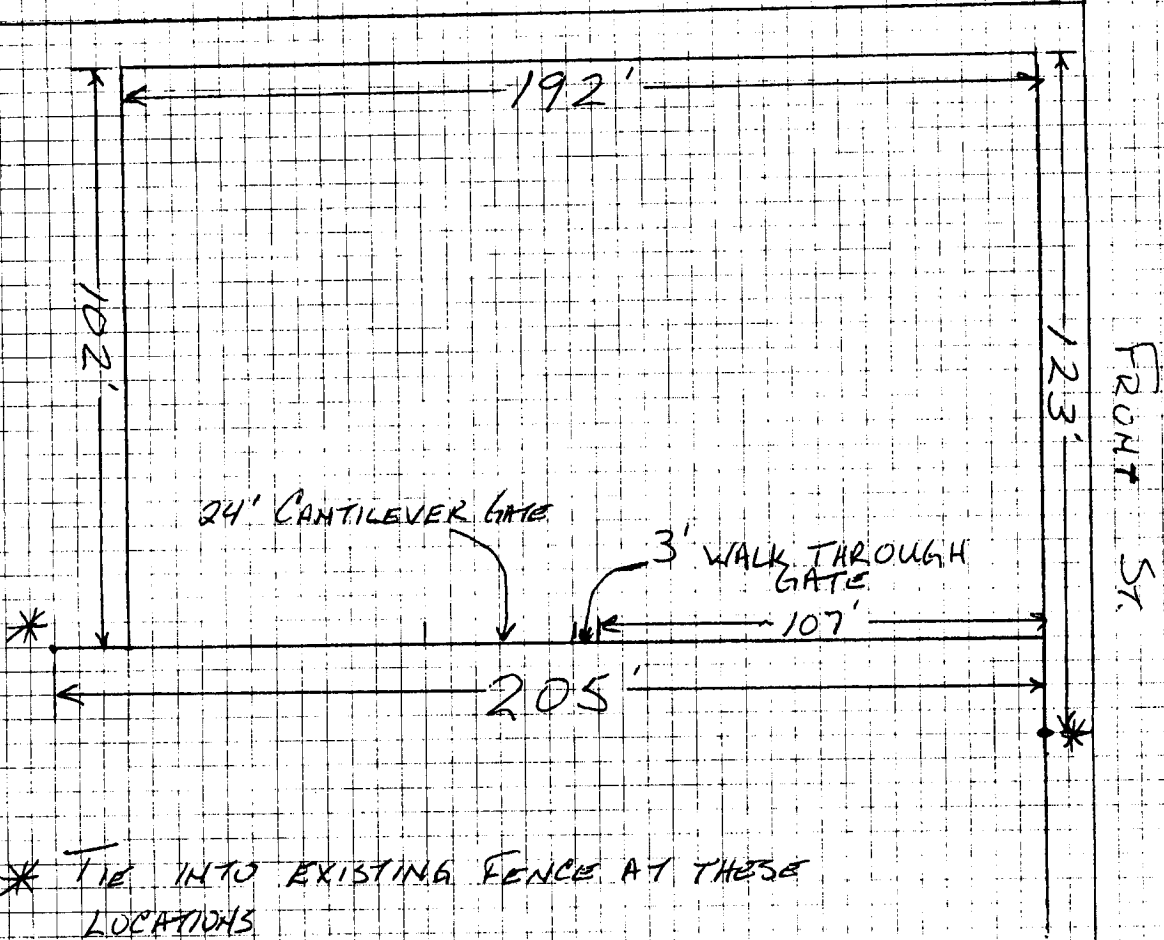

Computed by _____ Checked by _____

Approved by _____ Date Approved _____